


Digital Video Survey

**Micro NVR IP 68 Automotive
with Integrated Full PoE Switch
AutoInput 9-36 Vcc**

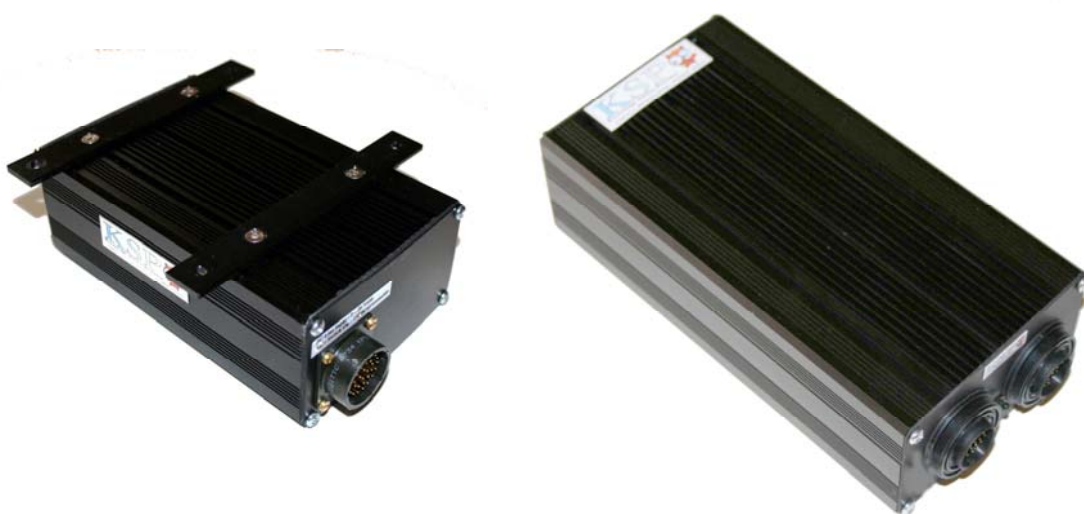

Appliance designed for implement Digital Video Survey on

**Certified for
Automotive & Railway**

*Special locations
Non conventional environment
Cars
Ambulance
Trucks
Public Transport
Bus
Trains
Sails*

Reseller

A product from



KSP Srl
Via Degli Orti n.1 - 26017 Quintano (CR) -Italy
info@ksp.it +39037381251 fax +390373255805

APPLIANCE FOR DIGITAL VIDEO SURVEY PLUG & PLAY AUTOMOTIVE

Micro Solid State Recording Server

Recording Server, Windows XP or Linux based, support from 1 to 8 IP camera
 Drive up to 8 IP PoE Cam (include a 8 port PoE Switch embedded)
 Completely Solid State, without "in movement" part (or with certified automotive conventional HDD)
 Operative System & Storage completely on Solid State memory
 Image Storage from 8Gb to 256 Gb and over with Hot Plug function & Raid
 1 Gb Ram, Processor C7 up to 3 Ghz
 Compatible with all IP Camera & Encoder (accept analog camera image input on NVR custom version)
 Recording & Management Software pre-installed with Export Data directly on HDD & USB Key
 Remote Access at Live & Recorded Image with ip connection (adsl, isdn, pstn, gprs, umts)
 Mounting Kit & Power Supply Automotive 9/12/24/48 Volt
 Interface on vehicle for automatic power switch on / off
 PreConfigured System, with all accessories for mounting e connection
 Strong Cripto of the storage on PGP & RSA algorithm, USB Key for Admin Access
 Connect directly to AVIM system via CAN Bus Protocol & Others on request
 Work in Multi NVR Environment like a black box, stand alone unit



Micro Unit 200x105x60 mm

ALUMINIUM ENCLOSURE IP68

Version from 1 to 8 IP Camera

All Connector are IP68

Integrated POE Switch

Certified for Automotive & Railway

100% COMPATIBLE WITH AXIS SOFTWARE AND MILESTONE.

CAN Bus Protocol compatible

Connect up to 8 IP Camera

Only One Power from 9 to 48 Volts for NVR & Poe

Optional Accessories

LCD Monitor from 7" Touchscreen with cabling and mounting kit
 LCD Display 13x64 mm and function keypad for monitoring and quick function key
 Multiple Size of Solid State Memory up to 500Gb
 Wireless connection via Modem Edge/UMTS/802.x Autosensing
 Battery Power Supply with Solar recharger

Micro Unit 220x105x60 mm

Preinstalled Included Software Main Function

LIVE monitoring, with custom video layout
 Recording (on Timer, motion triggered o Continuos)
 Control of PTZ camera
 Alarm Feature (acoustic, optical via e-mail or voice-call)
 Remote control via network or internet
 Recording Scheduler, Automatic Archive Rotation, People Counting
 AntiMask and Motion Detection
 Data and Face Privacy Cripto with Strong Security
 Access Profile for user, access via Web/PDA/SmartPhone

